


Mounting	Wall
Voltage (V)	24VDC
Class	III
IP	65
IK	07
Power (W)	3
Energy class light source	G
Light source	COB LED
Luminous Flux (lm)	77
Color temperature (K)	2700K
Light orientation	Indirect lighting
CRI	>90
Recommended driver On/Off	98324031
Luminaires per On/Off driver	De 1 a 10
Recommended DALI driver	98324101
Luminaires per DALI driver	De 1 a 25
Recommended CASAMBI driver	98324599
Luminaires per CASAMBI driver	De 1 a 30
Structure material	Aluminium
Diffuser material	Glass
Structure finish	Black
Diffuser finish	Transparent
Cut-out Size for Recessed Mount	37X96
Includes recessed box	Yes
Included Accessory	Caja de empotrar

 Installation instructions

 Energy label

 Photometric

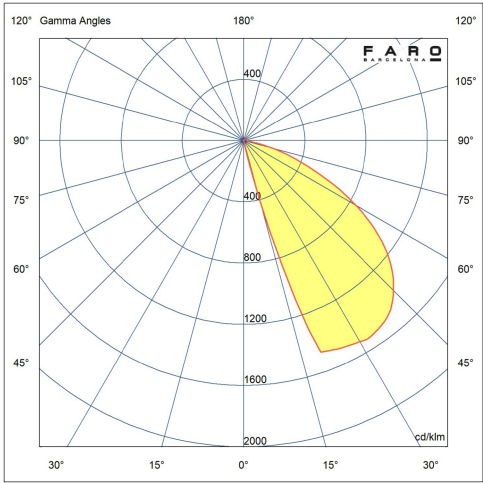

Recommended Drivers



SOURCE D'ALIMENTACION 24VDC 30W IP67

Reference	98324031
Voltage (V)	24VDC
IP	67
Power (W)	30
Control System	on/off

24Vdc 100W IP67 DALI power supply

Reference	98324101
Voltage (V)	220V-240V
Power (W)	100W
Control System	Dali



POWER SUPPLY 24VDC 120W 5A Casambi

Reference	98324599
Voltage (V)	24VDC
IP	20
Power (W)	120
Control System	Casambi